

Made in the Heartland of America Serving the World **Engineering & Manufacturing Solutions** 

#### **Specifications:**

- Orifice DIA. 0 0.250" (0 - 0.635 cm).
- Rated for 3000 psi (207 bar).
- Weighs 1/4 lb. (0.11 kg).
- 30-Micron Filtration Recommended.

ND HYDRAUL

• Port size #8 SAE (3/4-16).

# Series 84

Non-Adjustable Fixed Orifice




P84AFF-062





402.344.4434 • www.brand-hyd.com

# Series 84 Non-Adjustable Fixed Orifice

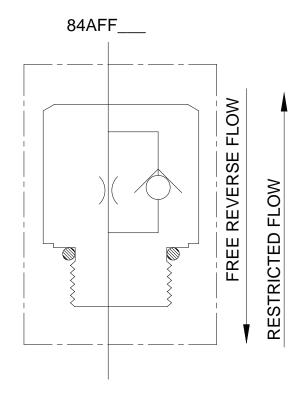



P84AFF-062

## **MATERIALS:**

- Black Oxide Steel Body.
- Buna N O'Rings (Standard).

### **FEATURES:**

- RESTRICTED FLOW allows flow to be metered through a specified orifice.
- FREE REVERSE FLOW allows fluid to move freely.

SERIES 84 REV(D)


### **SERIES 84 – GENERAL INFORMATION:**

The Brand, Series 84 is a two port, non-adjustable, inline, fixed orifice with free reverse flow. The flow is determined by the orifice diameter and fluid pressure. The orifice diameter must be specified by the customer when ordering (up to a diameter of 0.250" (6.35mm)). The orifice plate is held in place when it is connected to a #8 SAE male fitting. This restricted flow assembly is inexpensive and gives the customer the ability to change the orifice diameter by swapping the orifice plate with another that has a different orifice size.

#### SERIES 84 – EXAMPLES OF COMMON MODEL CODES:

84AFF.125	#8 SAE ports and an orifice diameter of 0.125 (3.18mm).
	#8 SAE ports and an orifice diameter of 0.063 (1.6mm).
84AFF	#8 SAE ports, indicate orifice diameter, as per example:
	84AFF.063 = .063" (1.6mm) orifice.
Paint (Optional)	(P) painted black (other colors available, consult factory), (MP)
	epoxy coating.

DIMENSIONAL DATA: DIMENSIONAL DATA (inches & [millimeters]):

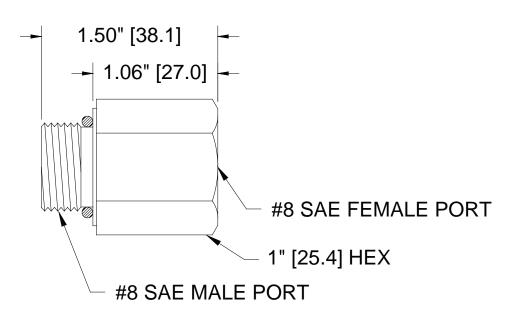

402.344.4434 • www.brand-hyd.com