ITEM NO.	QTY.	P.N.	DESCRIPTION
1	1	P1203	P1203 MACHINED CASTING
2	1	SF317B	PLUG
3	1	PC58	O-RING, 3-910
4	1	B5033	3/8 BALL BEARING
5	1	B505	SPRING
6	2	SF322	O-RING, 2-016
7	1	P1603	CAP NUT
8	1	P1583	ADJ. SCREW
9	1	P1607	WASHER
10	1	B5031	JAM NUT
11	1	P1654	WARNING TAG

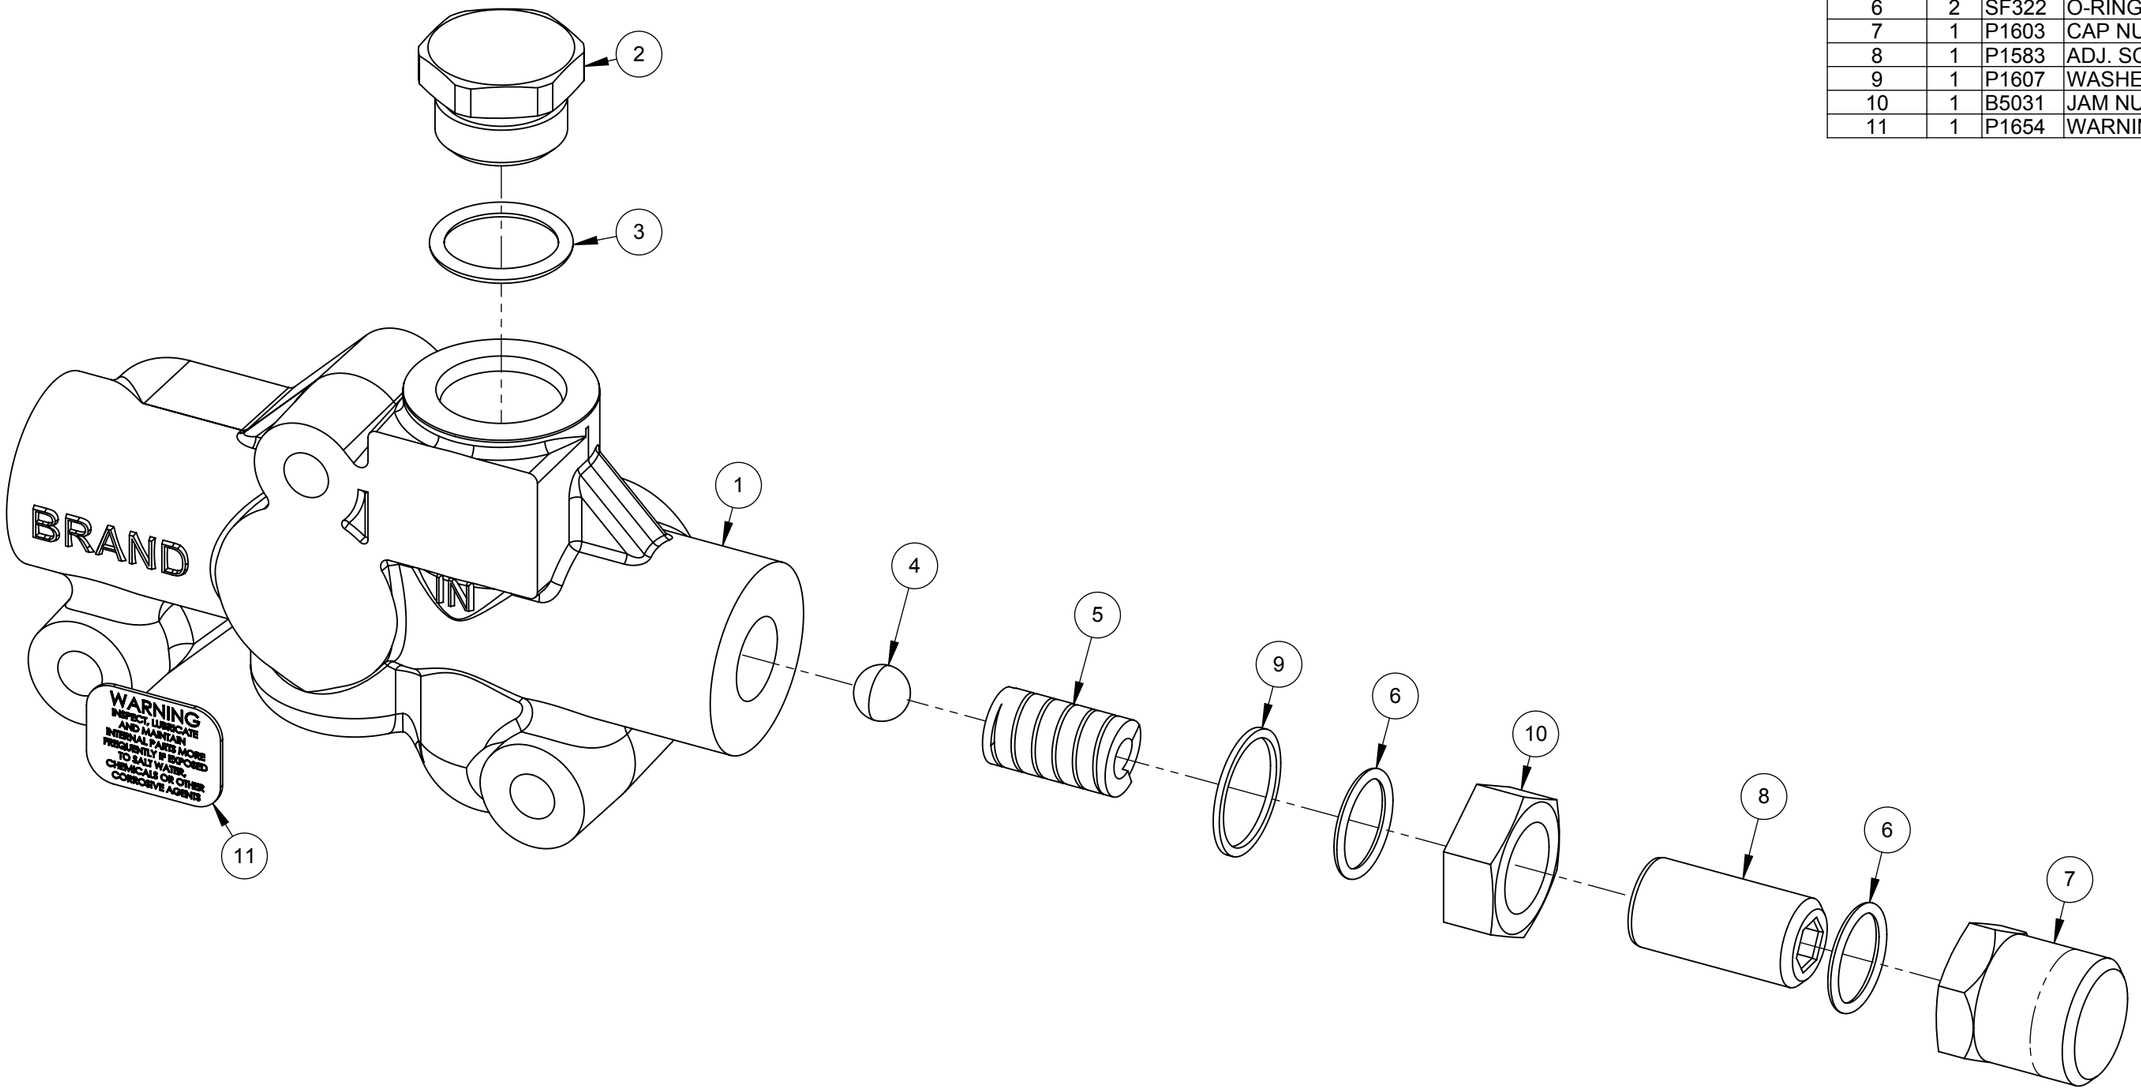

REV.	DATE	DESCRIPTION

BRAND HYDRAULICS CO., INC
2332 SOUTH 25TH STREET, OMAHA NEBRASKA 68105

TITLE: INLET, S34
END PORTED, RELIEF @ 1500 PSI, LOCKNUT

MATERIAL: -

STANDARD TOLERANCE UNLESS NOTED:
0.00 ± 0.010 (0.015 GCI)
0.000 ± 0.005 (0.010 GCI)
◎ = .005 TIR
FRACTION ± 1/32
ANGLE ± 2°
DIMENSIONS ARE IN INCHES

P/N ENDING IN "UF" HAVE NOT RECEIVED FINISH OPERATIONS

FINISHING SPECIFICATIONS:
HEAT TREAT: -±2RC X - ⇩
GRIND: -
PLATE: -

DRAWN BY: R. BATT
DATE: 12/05/2012
APRV'D BY:
APRV'D DATE:
SCALE: 1:1
FORMAT - B

PART NO: 34PG1B15-LN

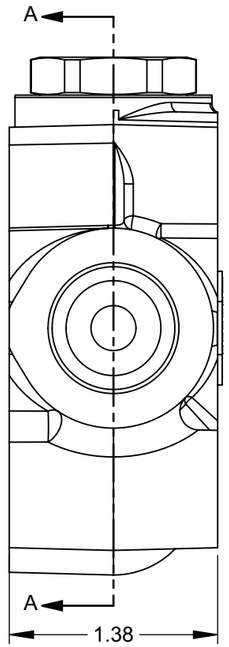

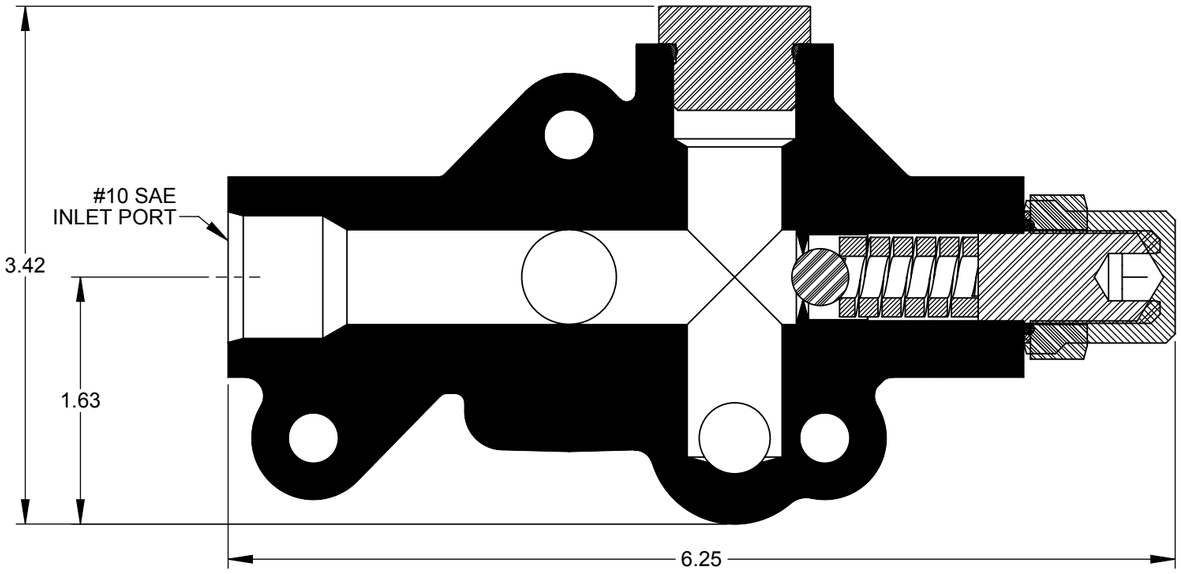

SECTION A-A

BRAND HYDRAULICS CO., INC
2332 SOUTH 25TH STREET, OMAHA NEBRASKA 68105

TITLE: INLET, S34 END PORTED, RELIEF @ 1500 PSI, LOCKNUT			MATERIAL: - -
STANDARD TOLERANCE UNLESS NOTED: 0.00 ± 0.010 (0.015 GCI) 0.000 ± 0.005 (0.010 GCI) ◎ = .005 TIR FRACTION ± 1/32 ANGLE ± 2° DIMENSIONS ARE IN INCHES	P/N ENDING IN "UF" HAVE NOT RECEIVED FINISH OPERATIONS FINISHING SPECIFICATIONS: HEAT TREAT: -±2RC X - ⩛ GRIND: - PLATE: -	DRAWN BY: R. BATT DATE: 12/05/2012 APRV'D BY: APRV'D DATE: SCALE: 1:1 FORMAT - B	PART NO: 34PG1B15-LN