ITEM NO.	QTY.	P.N.	DESCRIPTION
1	1	P1211	P1211 MACHINED CASTING
2	2	P1151	O-RING, 2-018
3	1	P1194	O-RING, 2-020
4	1	P1144	O-RING, 2-014 90D
5	3	P1145	STEEL SHIM
6	1	P1511	NUT, HYDRA LOK
7	1	P1532	S34 CONVERSION PLUG O TO C
8	1	P1533	ADAPTER, CLOSED CENTER, S34
9	1	PC58	O-RING, 3-910

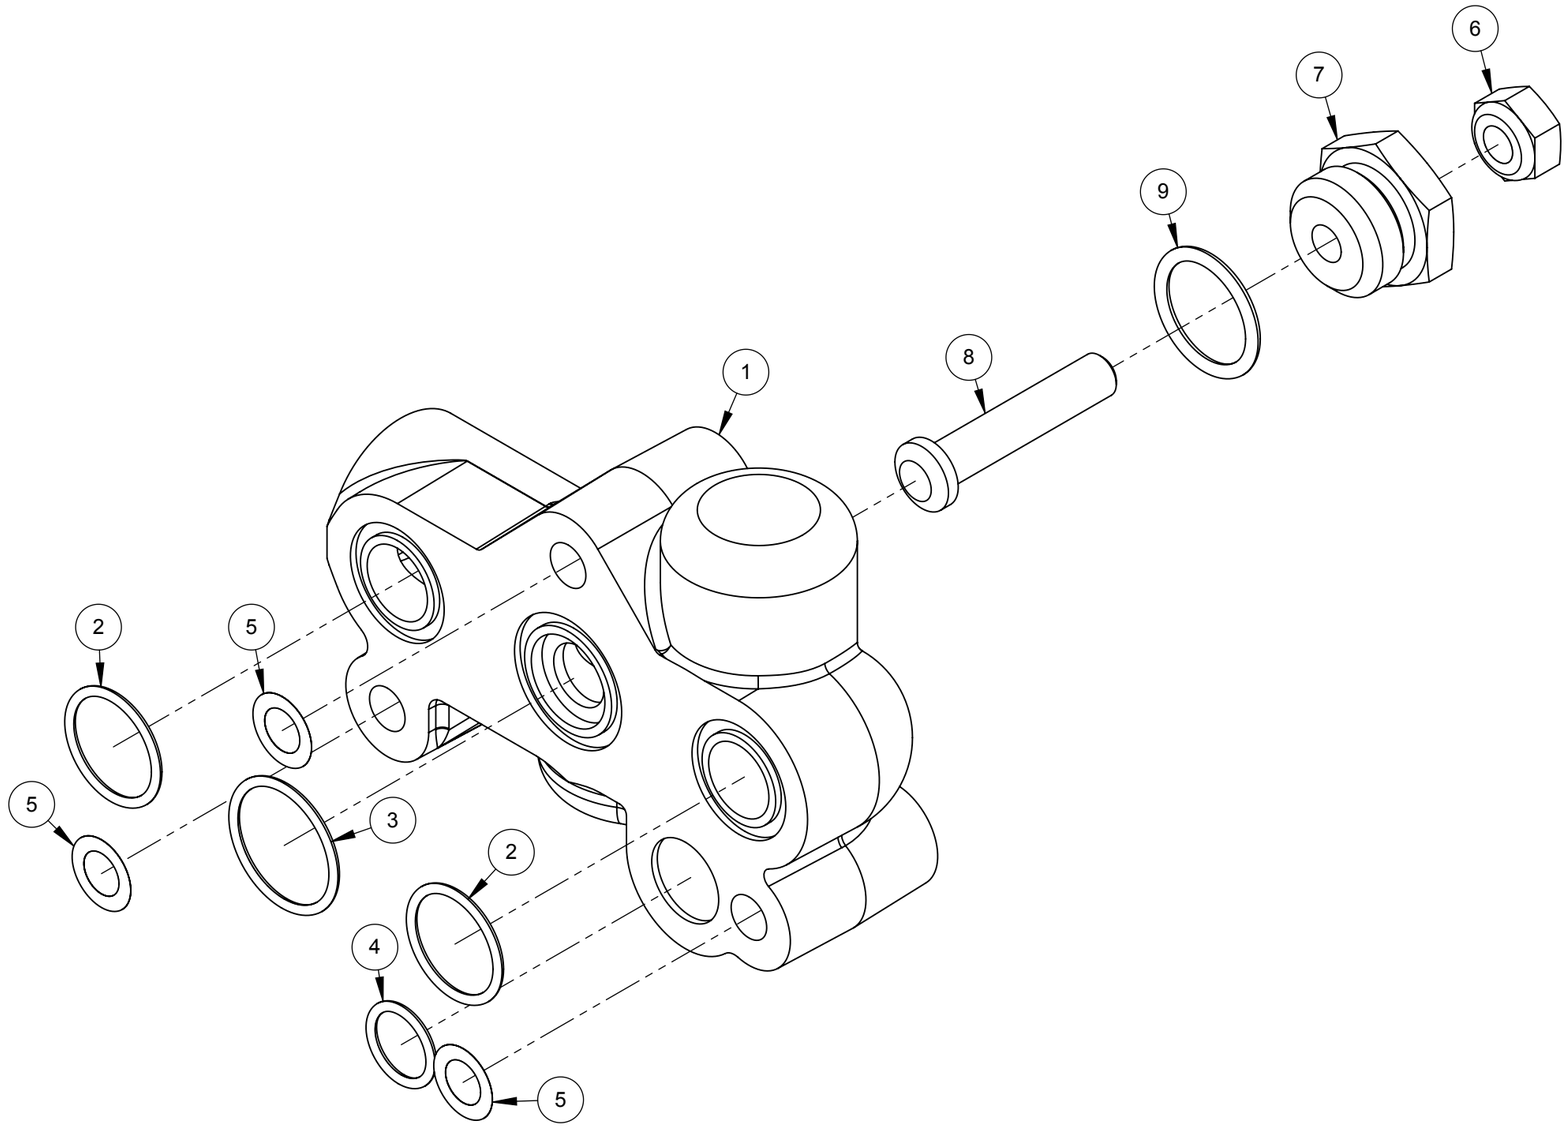

REV.	DATE	DESCRIPTION

APPLICABLE KIT:

(SEAL KIT BETWEEN SECTIONS) 34BK (SEE DRAWING 34BK FOR PARTS BREAKDOWN)

(OPEN-CLOSED CENTER PLUG KIT) 34AGC (SEE DRAWING 34AGC FOR PARTS BREAKDOWN)

BRAND HYDRAULICS CO., INC
2332 SOUTH 25TH STREET, OMAHA NEBRASKA 68105

TITLE: OUTLET, S34
END PORTED, CONVERTIBLE CENTER (OPEN TO CLOSED)

MATERIAL: -

STANDARD TOLERANCE UNLESS NOTED:
0.00 ± 0.010 (0.015 GCI)
0.000 ± 0.005 (0.010 GCI)
◎ = .005 TIR
FRACTION ± 1/32
ANGLE ± 2°
DIMENSIONS ARE IN INCHES

P/N ENDING IN "UF" HAVE NOT RECEIVED FINISH OPERATIONS

FINISHING SPECIFICATIONS:
HEAT TREAT: -±2RC X - ⩛
GRIND: -
PLATE: -

DRAWN BY: R. BATT
DATE: 12/06/2012
APRV'D BY:
APRV'D DATE:
SCALE: 1:1
FORMAT - B

PART NO: 34TG1D

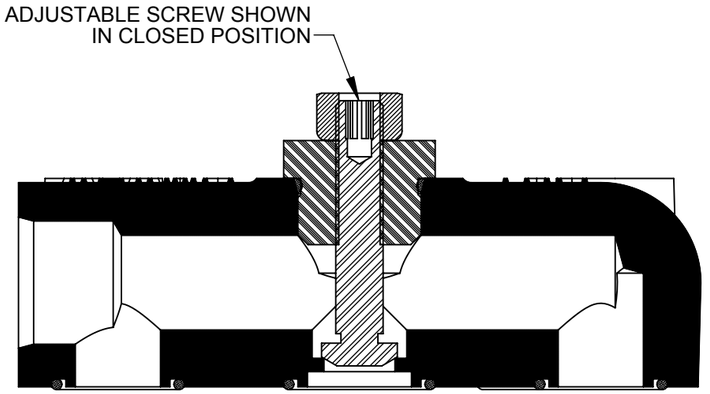

SECTION A-A

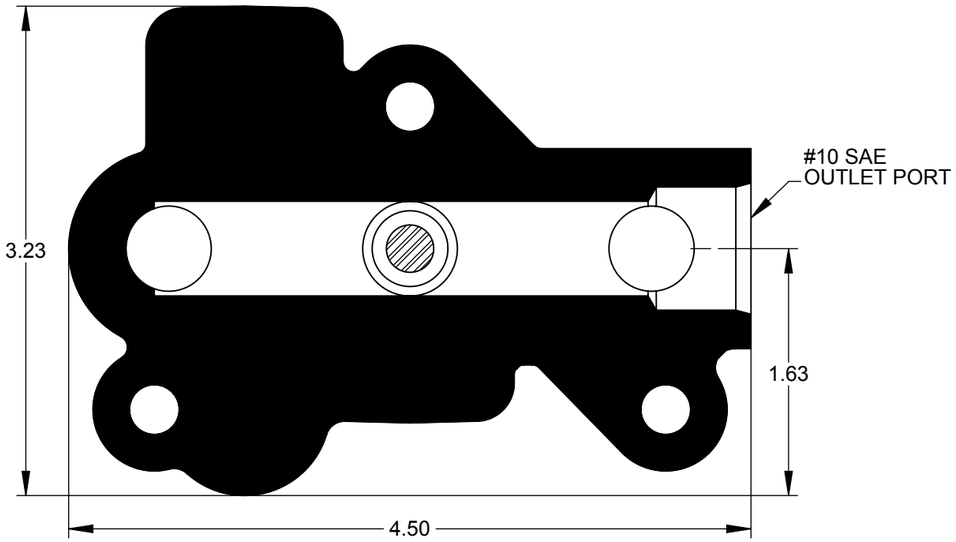

SECTION B-B

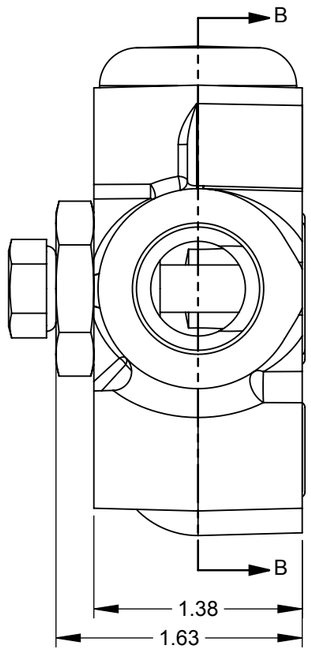

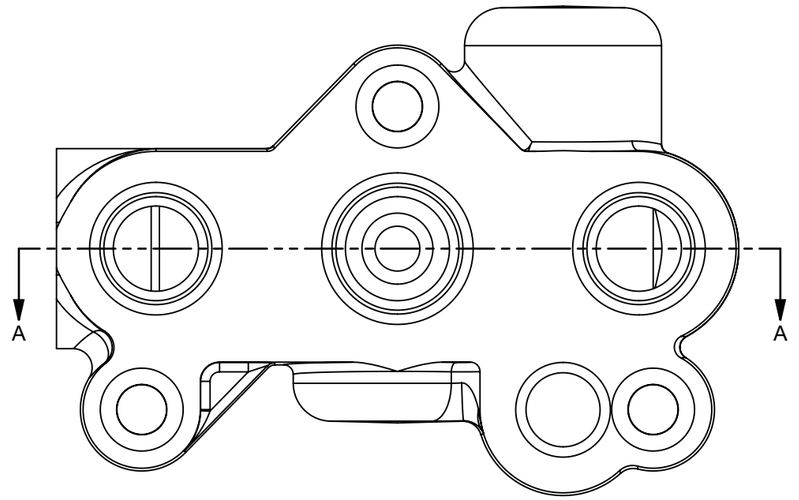

BRAND HYDRAULICS CO., INC 2332 SOUTH 25TH STREET, OMAHA NEBRASKA 68105			
TITLE: OUTLET, S34 END PORTED, CONVERTIBLE CENTER (OPEN TO CLOSED)			MATERIAL: -
STANDARD TOLERANCE UNLESS NOTED: 0.00 ± 0.010 (0.015 GCI) 0.000 ± 0.005 (0.010 GCI) ⌀ = .005 TIR FRACTION ± 1/32 ANGLE ± 2° DIMENSIONS ARE IN INCHES	P/N ENDING IN "UF" HAVE NOT RECEIVED FINISH OPERATIONS FINISHING SPECIFICATIONS: HEAT TREAT: -±2RC X - ↧ GRIND: - PLATE: -	DRAWN BY: R. BATT DATE: 12/06/2012 APRV'D BY: APRV'D DATE: SCALE: 1:1 FORMAT - B	PART NO: 34TG1D