ITEM NO.	QTY.	P.N.	DESCRIPTION
1	1	P1295	P1295 MACHINED CASTING
2	2	P1151	O-RING, 2-018
3	1	P1194	O-RING, 2-020
4	2	P1144	O-RING, 2-014 90D
5	3	P1145	STEEL SHIM
6	1	SF317B	PLUG
7	2	PC58	O-RING, 3-910
8	1	P1212	S34 PWR BEYOND CART

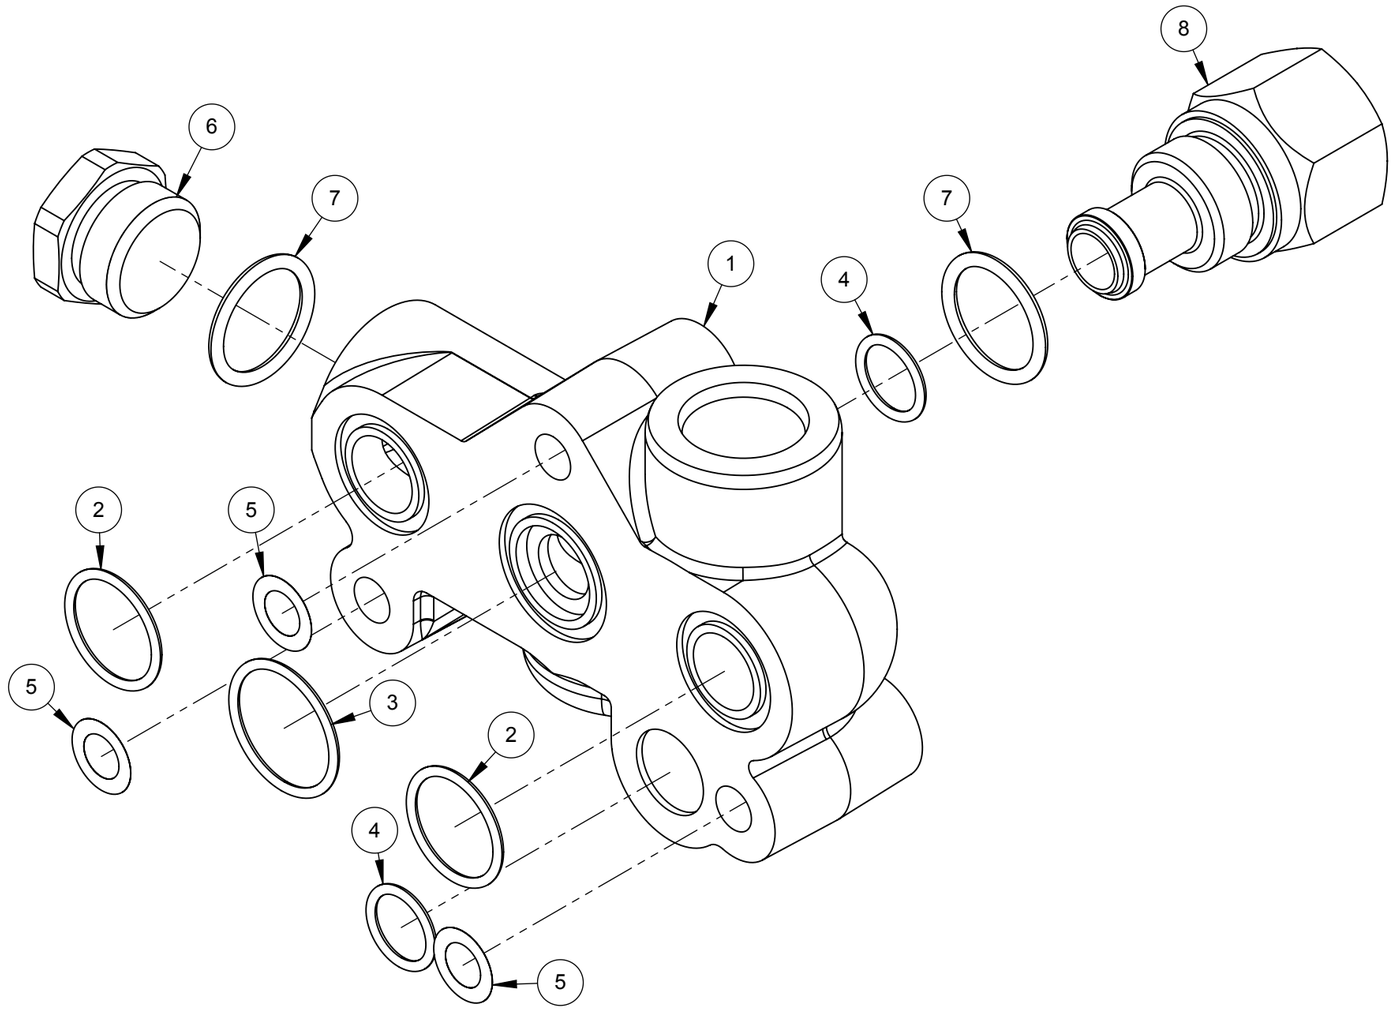

REV.	DATE	DESCRIPTION

APPLICABLE KIT:

(SEAL KIT BETWEEN SECTIONS) 34BK (SEE DRAWING 34BK FOR PARTS BREAKDOWN)

(POWER BEYOND KIT) 34AGPB (SEE DRAWING 34AGPB FOR PARTS BREAKDOWN)

BRAND HYDRAULICS CO., INC
2332 SOUTH 25TH STREET, OMAHA NEBRASKA 68105

TITLE: OUTLET, S34
TOP PORTED, POWER BEYOND

MATERIAL: -

STANDARD TOLERANCE UNLESS NOTED:
0.00 ± 0.010 (0.015 GCI)
0.000 ± 0.005 (0.010 GCI)
⌀ = .005 TIR
FRACTION ± 1/32
ANGLE ± 2°
DIMENSIONS ARE IN INCHES

P/N ENDING IN "UF" HAVE NOT RECEIVED FINISH OPERATIONS

FINISHING SPECIFICATIONS:
HEAT TREAT: -±2RC X - ▽
GRIND: -
PLATE: -

DRAWN BY: R. BATT
DATE: 12/06/2012
APRV'D BY:
APRV'D DATE:
SCALE: 1:1
FORMAT - B

PART NO: 34TG2B

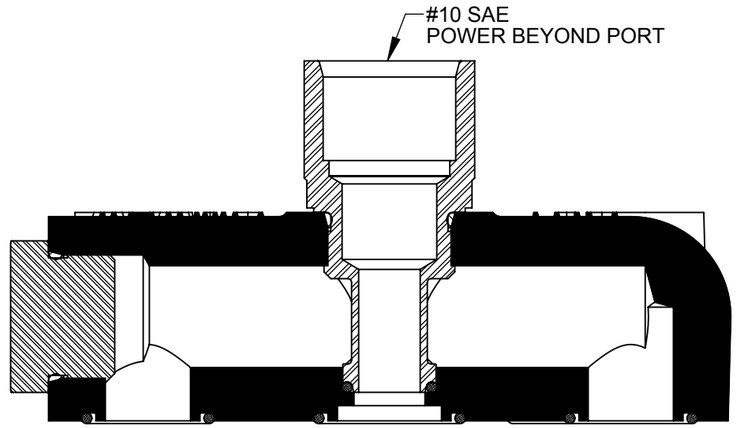

SECTION A-A

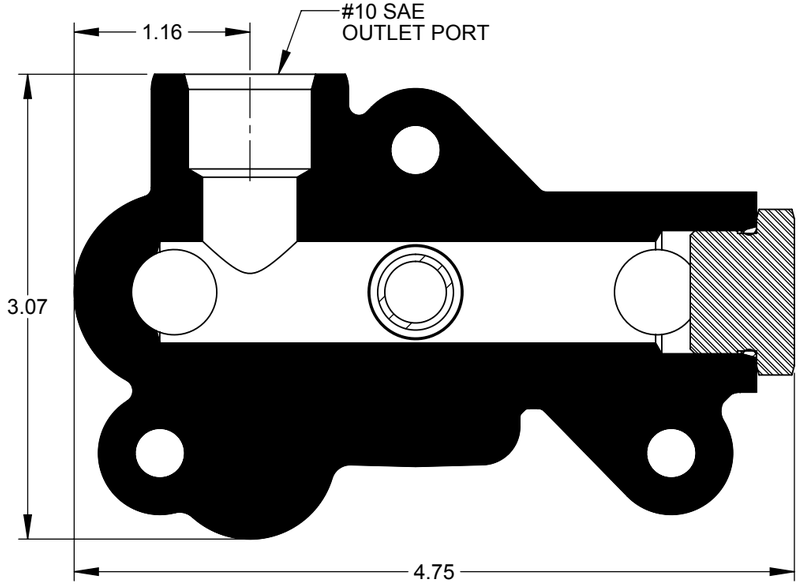

SECTION B-B

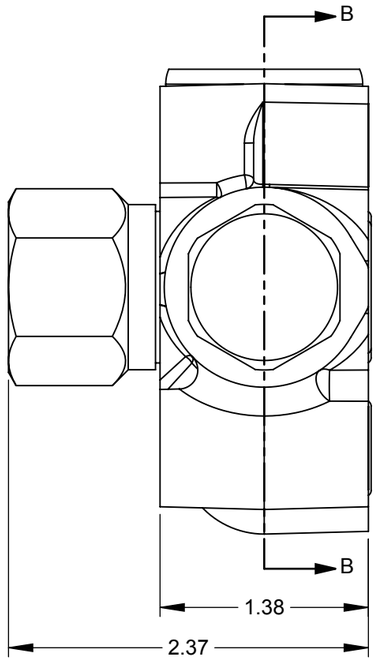

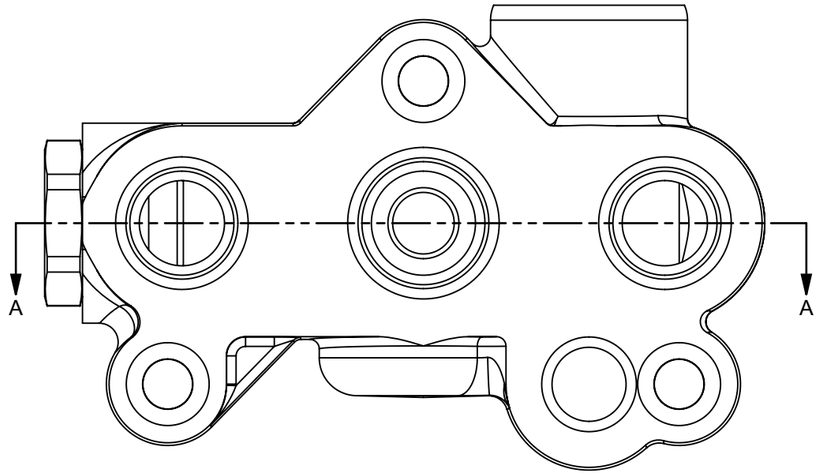

BRAND HYDRAULICS CO., INC
2332 SOUTH 25TH STREET, OMAHA NEBRASKA 68105

TITLE: OUTLET, S34 TOP PORTED, POWER BEYOND			MATERIAL: - -
STANDARD TOLERANCE UNLESS NOTED: 0.00 ± 0.010 (0.015 GCI) 0.000 ± 0.005 (0.010 GCI) ⌀ = .005 TIR FRACTION ± 1/32 ANGLE ± 2° DIMENSIONS ARE IN INCHES	P/N ENDING IN "UF" HAVE NOT RECEIVED FINISH OPERATIONS FINISHING SPECIFICATIONS: HEAT TREAT: -±2RC X - ⩛ GRIND: - PLATE: -	DRAWN BY: R. BATT DATE: 12/06/2012 APRV'D BY: APRV'D DATE: SCALE: 1:1 FORMAT - B	PART NO: 34TG2B