ITEM NO.	QTY.	P.N.	DESCRIPTION
1	1	P1294	P1294 MACHINED CASTING
2	2	P1151	O-RING, 2-018
3	1	P1194	O-RING, 2-020
4	1	P1144	O-RING, 2-014 90D
5	3	P1145	STEEL SHIM
6	1	SF317B	PLUG
7	1	PC58	O-RING, 3-910
8	1	P1156	CC PLUG

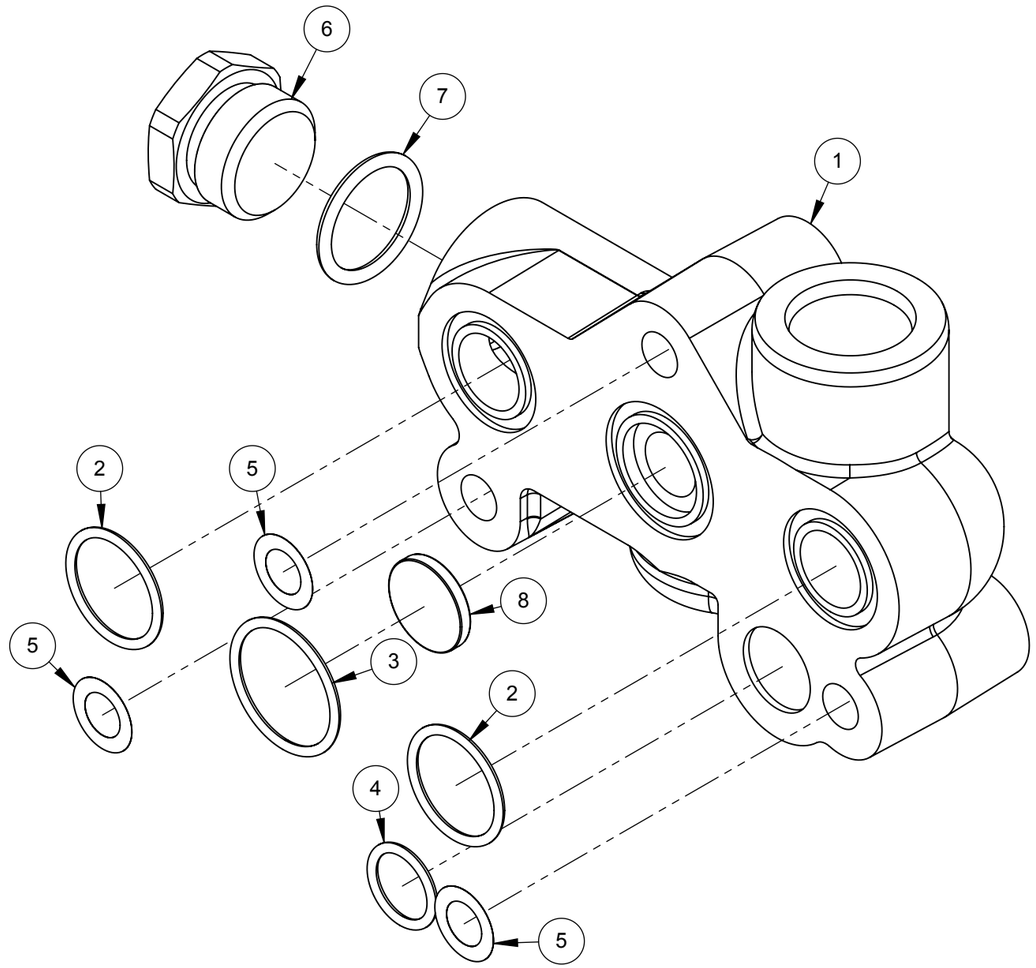

REV.	DATE	DESCRIPTION

BRAND HYDRAULICS CO., INC
2332 SOUTH 25TH STREET, OMAHA NEBRASKA 68105

TITLE: OUTLET, S34
TOP PORTED, CLOSED CENTER

MATERIAL: -

STANDARD TOLERANCE UNLESS NOTED:
0.00 ± 0.010 (0.015 GCI)
0.000 ± 0.005 (0.010 GCI)
◎ = .005 TIR
FRACTION ± 1/32
ANGLE ± 2°
DIMENSIONS ARE IN INCHES

P/N ENDING IN "UF" HAVE NOT RECEIVED FINISH OPERATIONS

FINISHING SPECIFICATIONS:
HEAT TREAT: -±2RC X - ⩛
GRIND: -
PLATE: -

DRAWN BY: R. BATT
DATE: 12/06/2012
APRV'D BY:
APRV'D DATE:
SCALE: 1:1
FORMAT - B

PART NO: 34TG2C

APPLICABLE KIT:

(SEAL KIT BETWEEN SECTIONS) 34BK (SEE DRAWING 34BK FOR PARTS BREAKDOWN)

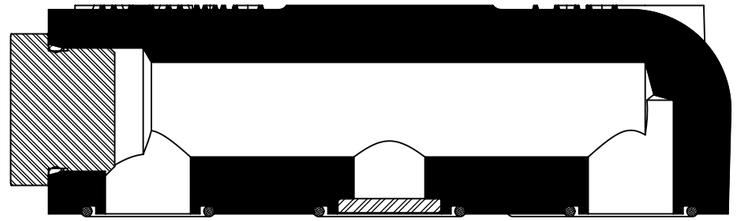

SECTION A-A

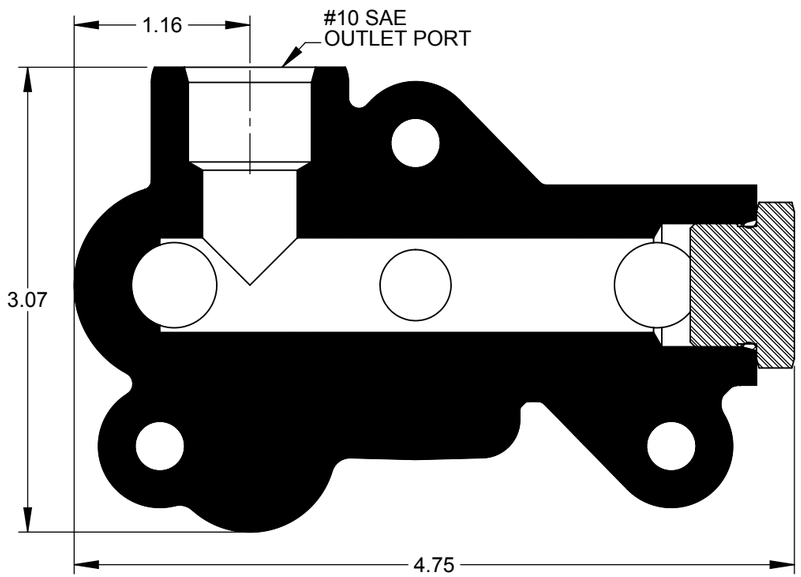

SECTION B-B

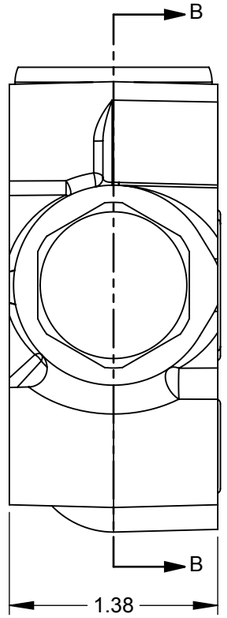

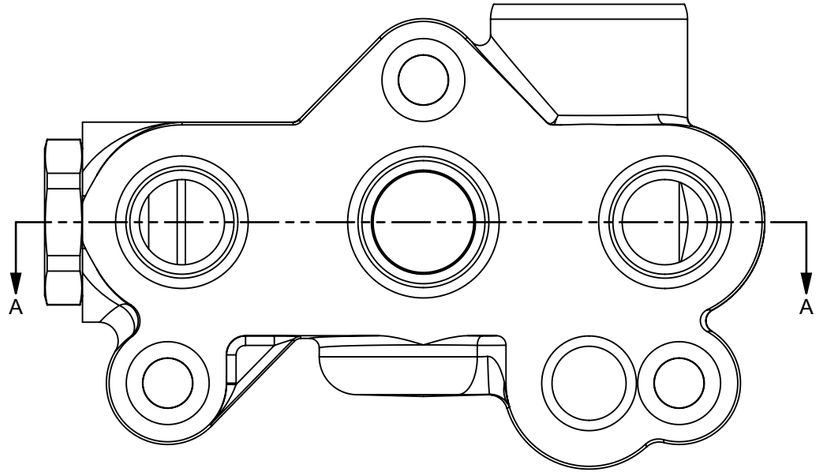

BRAND HYDRAULICS CO., INC
2332 SOUTH 25TH STREET, OMAHA NEBRASKA 68105

TITLE: OUTLET, S34 TOP PORTED, CLOSED CENTER			MATERIAL: - -
STANDARD TOLERANCE UNLESS NOTED: 0.00 ± 0.010 (0.015 GCI) 0.000 ± 0.005 (0.010 GCI) ◎ = .005 TIR FRACTION ± 1/32 ANGLE ± 2° DIMENSIONS ARE IN INCHES	P/N ENDING IN "UF" HAVE NOT RECEIVED FINISH OPERATIONS FINISHING SPECIFICATIONS: HEAT TREAT: -±2RC X - ⩛ GRIND: - PLATE: -	DRAWN BY: R. BATT DATE: 12/06/2012 APRV'D BY: APRV'D DATE: SCALE: 1:1 FORMAT - B	PART NO: 34TG2C