| ITEM NO. | QTY. | P.N. | DESCRIPTION |
|---|---|---|---|
| 1 | 1 | P1326 | SER36 CAST INLET W/UNLOADING |
| 2 | 1 | P1327 | SPOOL |
| 3 | 1 | P1321 | SPRING |
| 4 | 1 | P1328 | UNLOADING PLUG |
| 5 | 1 | PC38 | O-RING, 3-908 |
| 6 | 1 | SF397 | PLUG |
| 7 | 1 | P1320 | POPPET |
| 8 | 1 | P1335A | SET SCREW |
| 9 | 1 | P1675 | SPRING 0.312 0.780 175.0 |
| 10 | 1 | P1609 | HYDRALOK NUT |

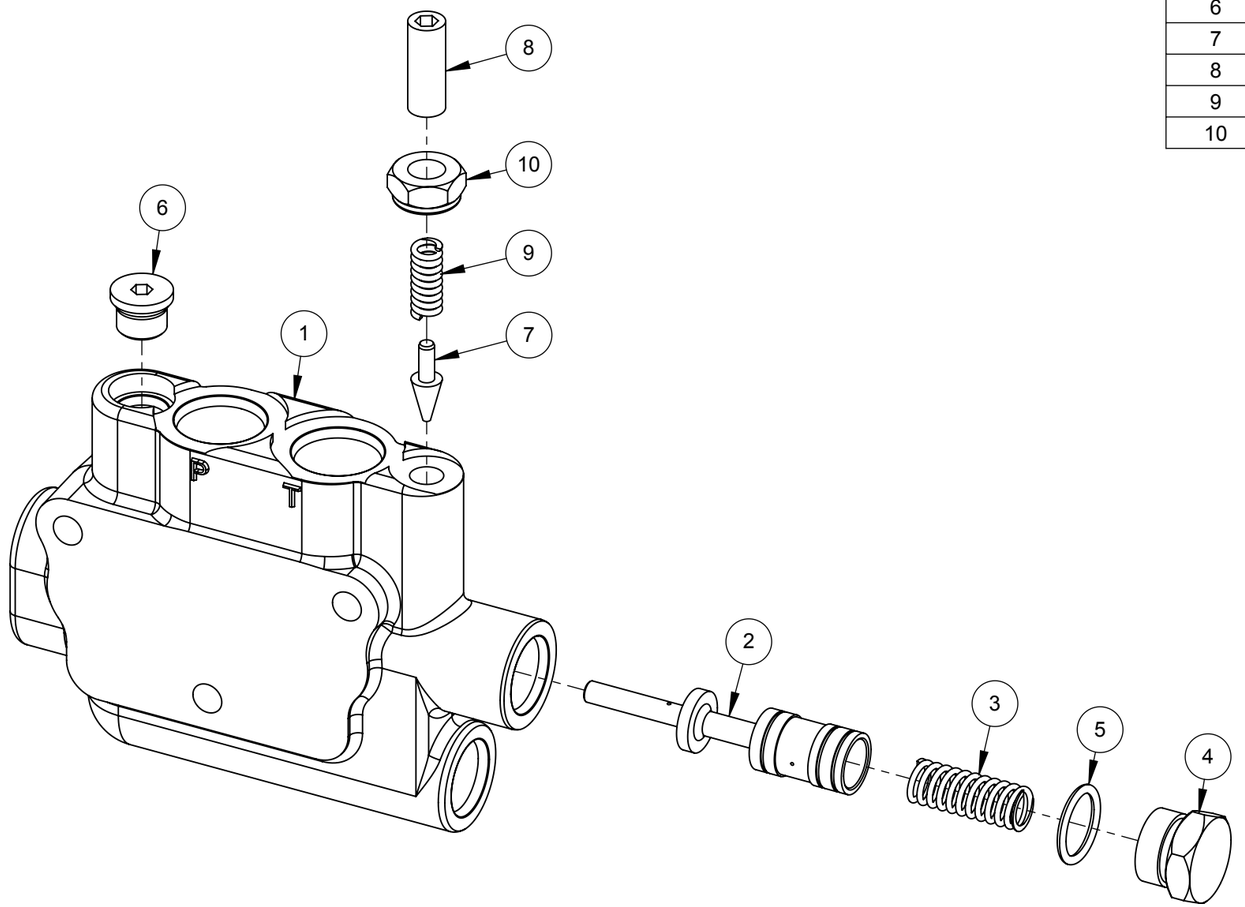


| REV. | DATE | DESCRIPTION |
|---|---|---|

BRAND HYDRAULICS CO., INC
2332 SOUTH 25TH STREET, OMAHA NEBRASKA 68105

TITLE: S36, INLET
UNLOADING, RELIEF @ 1500 PSI

MATERIAL: -

STANDARD TOLERANCE UNLESS NOTED:
0.00 ± 0.010 (0.015 GCI)
0.000 ± 0.005 (0.010 GCI)
◎ = .005 TIR
FRACTION ± 1/32
ANGLE ± 2°
DIMENSIONS ARE IN INCHES

P/N ENDING IN "UF" HAVE NOT RECEIVED FINISH OPERATIONS

FINISHING SPECIFICATIONS:
HEAT TREAT: -±2RC X - ⇩
GRIND: -
PLATE: -

DRAWN BY: R. BATT
DATE: 01/08/2013
APRV'D BY:
APRV'D DATE:
SCALE: 2:3
FORMAT - B

PART NO: 36PG2UP15

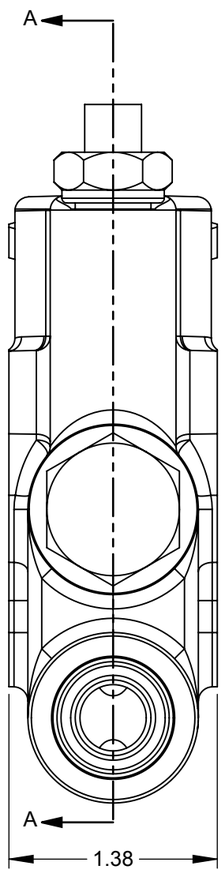


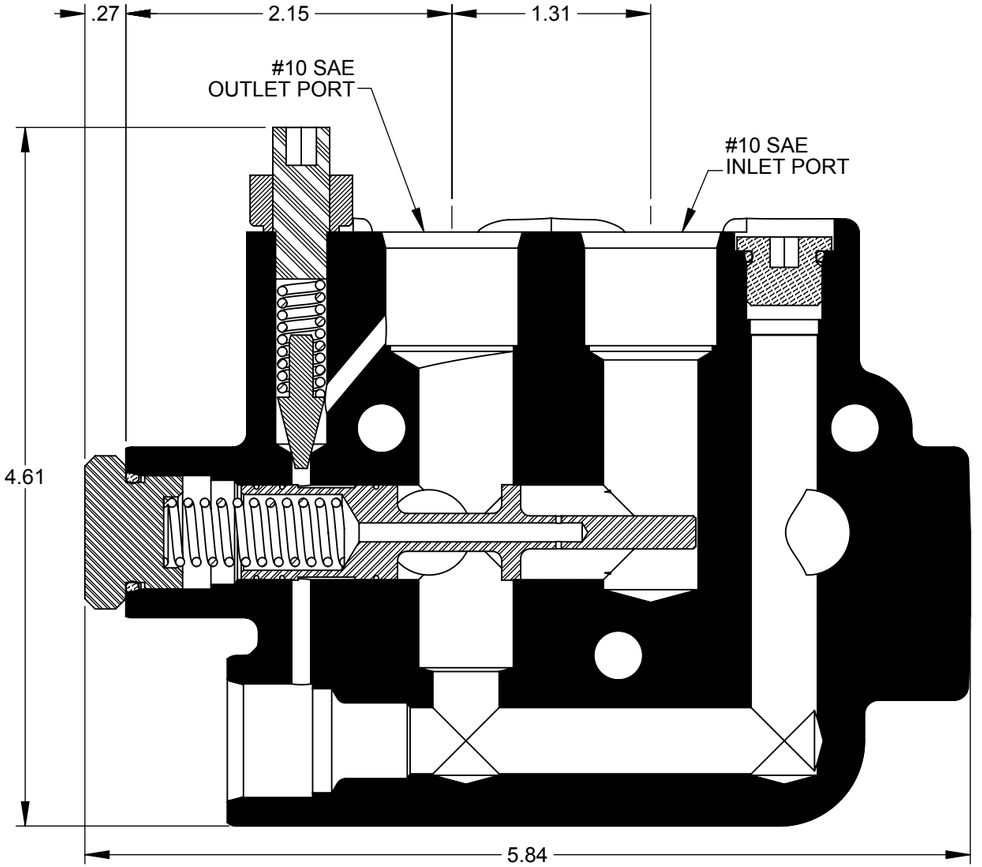


SECTION A-A

| | | | |
|---|---|---|---|
| BRAND HYDRAULICS CO., INC<br>2332 SOUTH 25TH STREET, OMAHA NEBRASKA 68105 | | | |
| TITLE: S36, INLET<br>UNLOADING, RELIEF @ 1500 PSI | | | MATERIAL:<br>- |
| STANDARD TOLERANCE UNLESS NOTED:<br>0.00 ± 0.010 (0.015 GCI)<br>0.000 ± 0.005 (0.010 GCI)<br>◎ = .005 TIR<br>FRACTION ± 1/32<br>ANGLE ± 2°<br>DIMENSIONS ARE IN INCHES | P/N ENDING IN "UF" HAVE NOT RECEIVED FINISH OPERATIONS<br>FINISHING SPECIFICATIONS:<br>HEAT TREAT: - ±2RC X - ⩛<br>GRIND: -<br>PLATE: - | DRAWN BY: R. BATT<br>DATE: 01/08/2013<br>APRV'D BY:<br>APRV'D DATE:<br>SCALE: 1:1<br>FORMAT - B | PART NO:<br>36PG2UP15 |