ITEM NO.	QTY.	P.N.	DESCRIPTION
1	1	P1450BEM	S38 CASTING, LOW, END
2	1	P1310EM	SPOOL
3	1	P1323ME	SPRING
4	1	P1311M	END CAP
5	2	PC58	O-RING, 3-910
6	1	P1323ME	SPRING
7	1	P1509	SPOOL STOP
8	2	P1342	O-RING, 2-017
9	3	P1145	STEEL SHIM
10	1	SF437	O RING 2-003 90D
11	1	P1853	HANDLE ENDCAP
12	1	P1856	HANDLE BRKT
13	1	P1857	HANDLE CLEVIS
14	1	P1817A	LINKAGE
15	1	P1855	ROD CLEVIS
16	1	P1938	BOOT
17	1	P1852	HANDLE ROD
18	1	P1858	S36 POLYPAK
19	1	P1354MB	S36/38 ELHAND WASHER
20	1	P1350A	SPOOL ATTM.
21	1	P1353A	SPACER for S36
22	1	P1854	NUT, 1/2-20
23	2	P1816	SPOOL PIN
24	1	P1703	CAP SCREW
25	2	P1767	PIN CLIP
26	1	S039S	S20 HANDLE
27	1	P1268	KNOB
28	1	P1305	5/16-24 NSF JAM NUT
29	2	P1520	3/32 STEEL BALL
30	1	P1144	O-RING, 2-014 90D

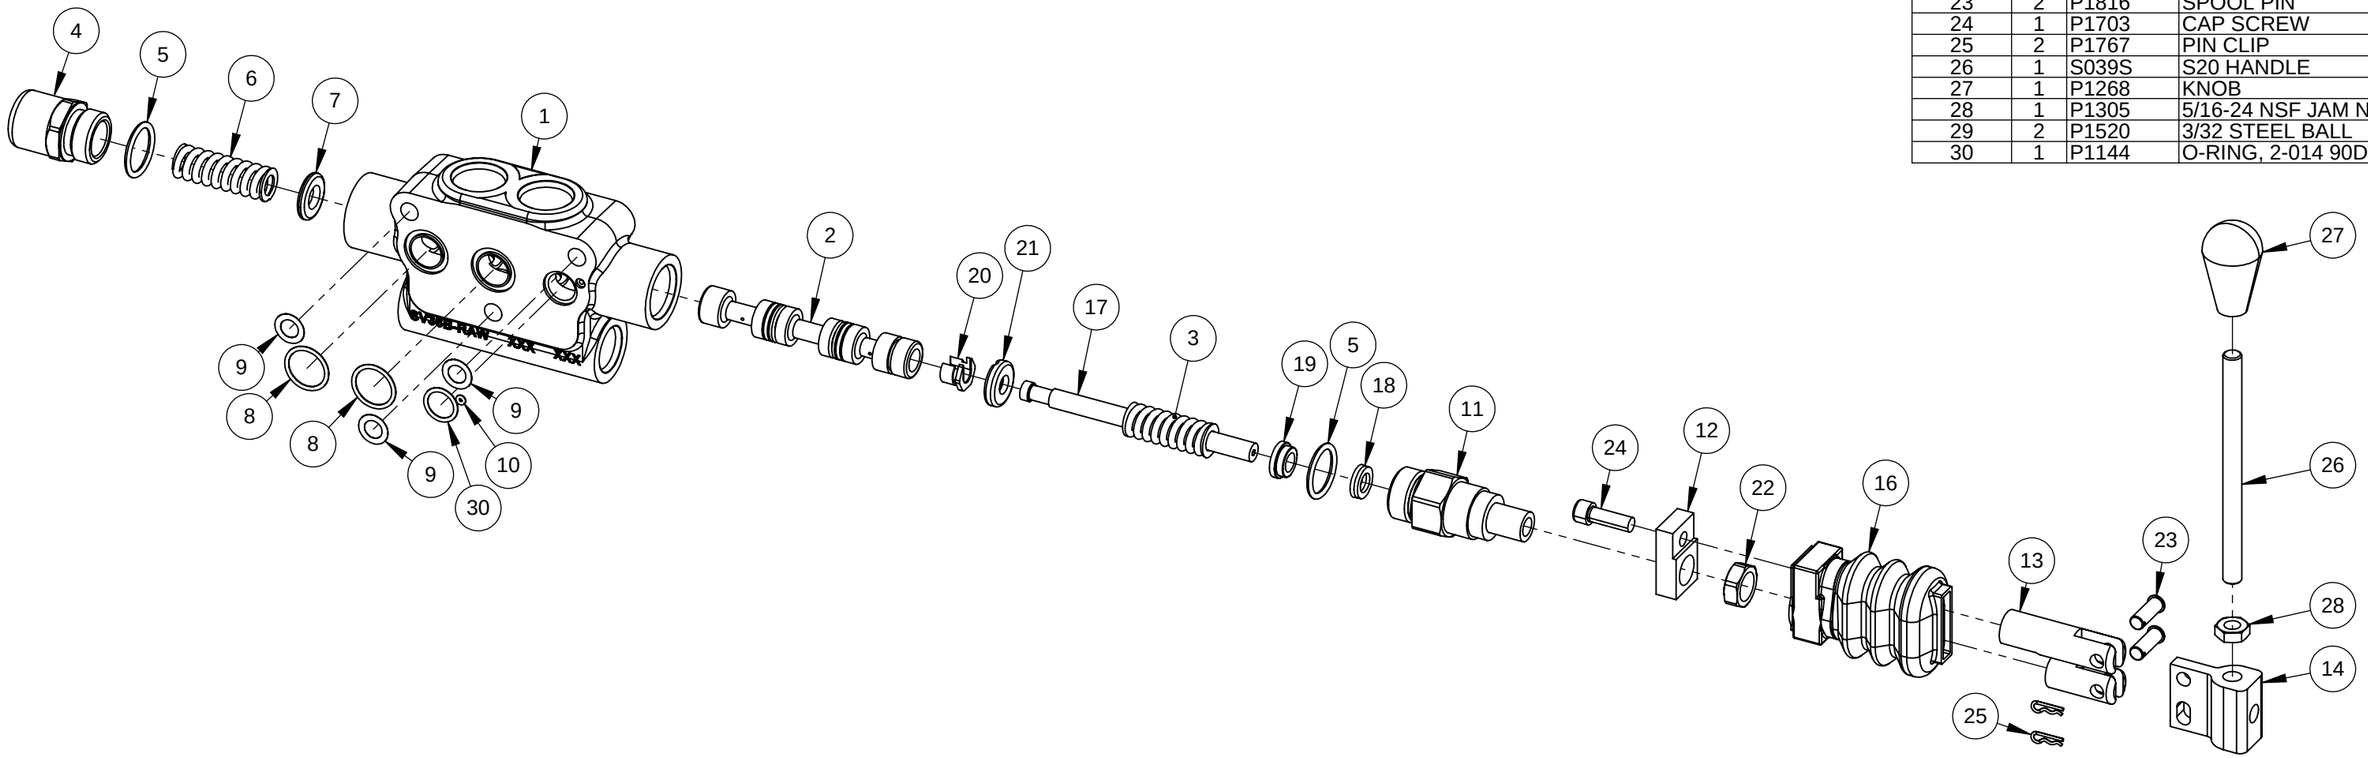

REV.	DATE	DESCRIPTION

NOTE:

1. (SEAL KIT) 36BK (SEE DRAWING 36BK FOR PARTS BREAKDOWN)

BRAND HYDRAULICS CO., INC
2332 SOUTH 25TH STREET, OMAHA NEBRASKA 68105

TITLE: S38, LOW WORK SECTION
BLOCKED, ELEC. & MAN., END SECT

MATERIAL: - -

STANDARD TOLERANCE UNLESS NOTED:
0.00 ± 0.010 (0.015 GCI)
0.000 ± 0.005 (0.010 GCI)
⌀ = .005 TIR
FRACTION ± 1/32
ANGLE ± 2°
DIMENSIONS ARE IN INCHES

P/N ENDING IN "UF" HAVE NOT RECEIVED FINISH OPERATIONS

FINISHING SPECIFICATIONS:
HEAT TREAT: -±2RC X - ⩛
GRIND: -
PLATE: -

DRAWN BY: R. BATT
DATE: 02/15/2013
APRV'D BY:
APRV'D DATE:
SCALE: 2:5
FORMAT - B

PART NO: 38BGXBHA

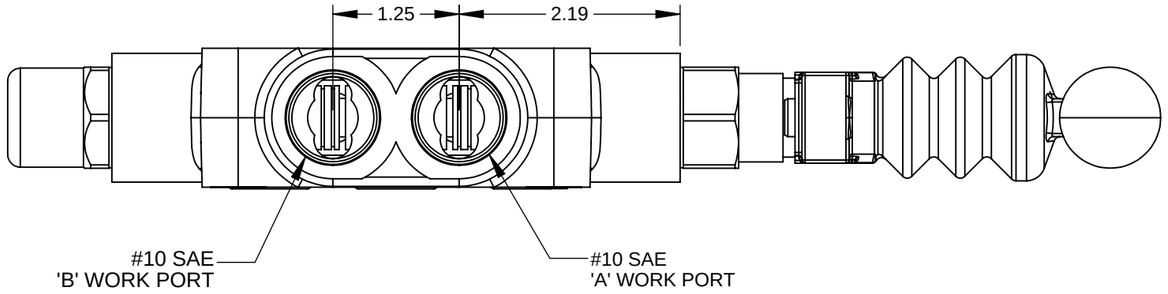

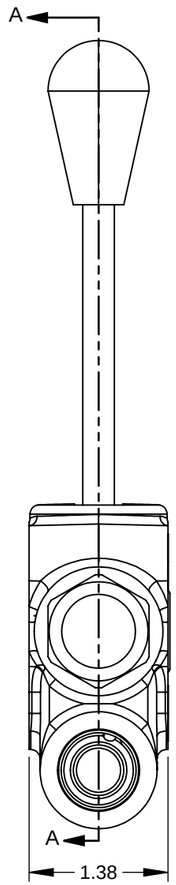

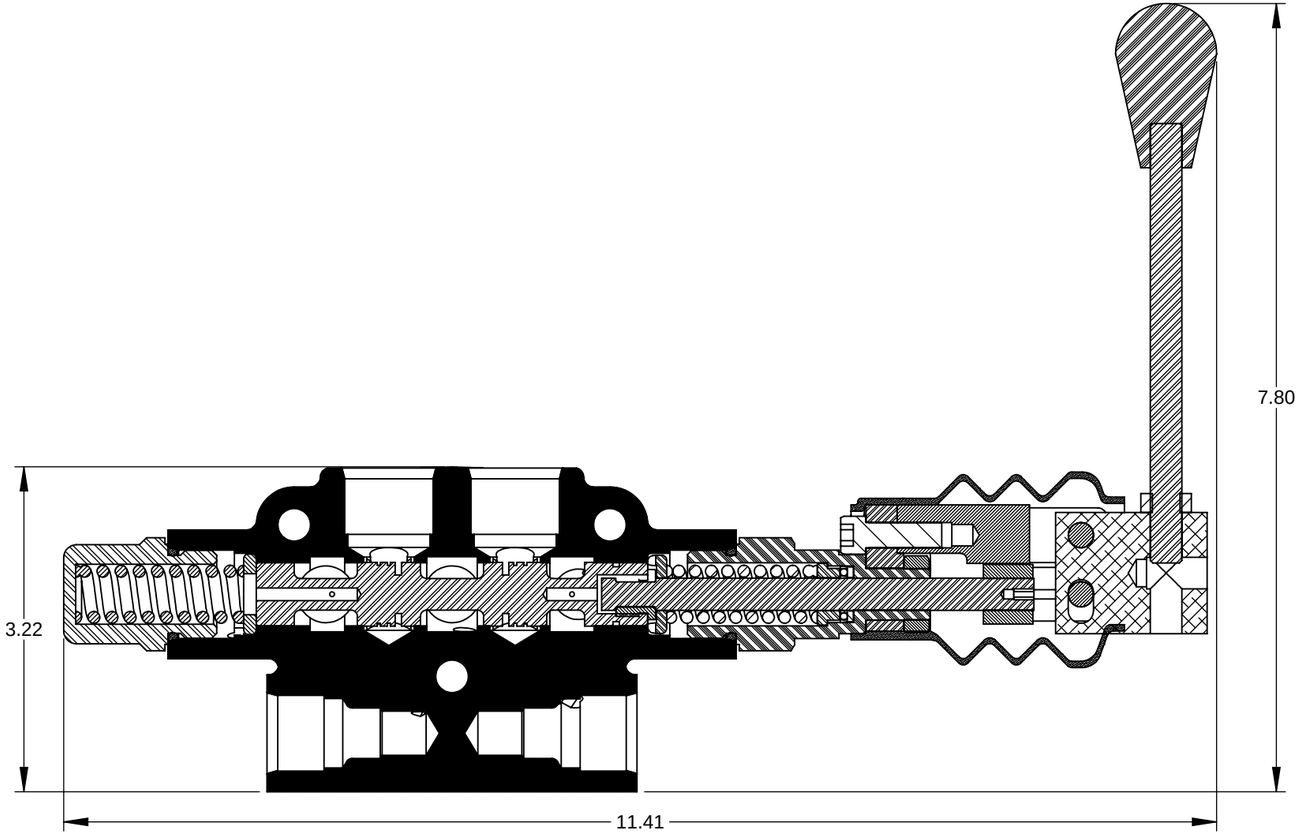

SECTION A-A

BRAND HYDRAULICS CO., INC 2332 SOUTH 25TH STREET, OMAHA NEBRASKA 68105			
TITLE: S38, LOW WORK SECTION BLOCKED, ELEC. & MAN., END SECT			MATERIAL: - -
STANDARD TOLERANCE UNLESS NOTED: 0.00 ± 0.010 (0.015 GCI) 0.000 ± 0.005 (0.010 GCI) ⌀ = .005 TIR FRACTION ± 1/32 ANGLE ± 2° DIMENSIONS ARE IN INCHES	P/N ENDING IN "UF" HAVE NOT RECEIVED FINISH OPERATIONS FINISHING SPECIFICATIONS: HEAT TREAT: -±2RC X - ⩛ GRIND: - PLATE: -	DRAWN BY: R. BATT DATE: 02/15/2013 APRV'D BY: APRV'D DATE: SCALE: 2:3 FORMAT - B	PART NO: 38BGXBHA