ITEM NO.	QTY.	P.N.	DESCRIPTION
1	1	P1450	S38 CASTING
2	1	P1310EM	SPOOL
3	1	P1311M	END CAP
4	2	PC58	O-RING, 3-910
5	1	P1323ME	SPRING
6	1	P1509	SPOOL STOP
7	3	P1342	O-RING, 2-017
8	3	P1145	STEEL SHIM
9	1	P1853	HANDLE ENDCAP
10	1	P1856	HANDLE BRKT
11	1	P1857	HANDLE CLEVIS
12	1	P1817A	LINKAGE
13	1	P1855	ROD CLEVIS
14	1	P1938	BOOT
15	1	P1852	HANDLE ROD
16	1	P1858	S36 POLYPAK
17	1	P1354MB	S36/38 ELHAND WASHER
18	1	P1350A	SPOOL ATTM.
19	1	P1353A	SPACER for S36
20	1	P1854	NUT, 1/2-20
21	2	P1816	SPOOL PIN
22	1	P1703	CAP SCREW
23	2	P1767	PIN CLIP
24	1	S039S	S20 HANDLE
25	1	P1268	KNOB
26	1	P1305	5/16-24 NSF JAM NUT

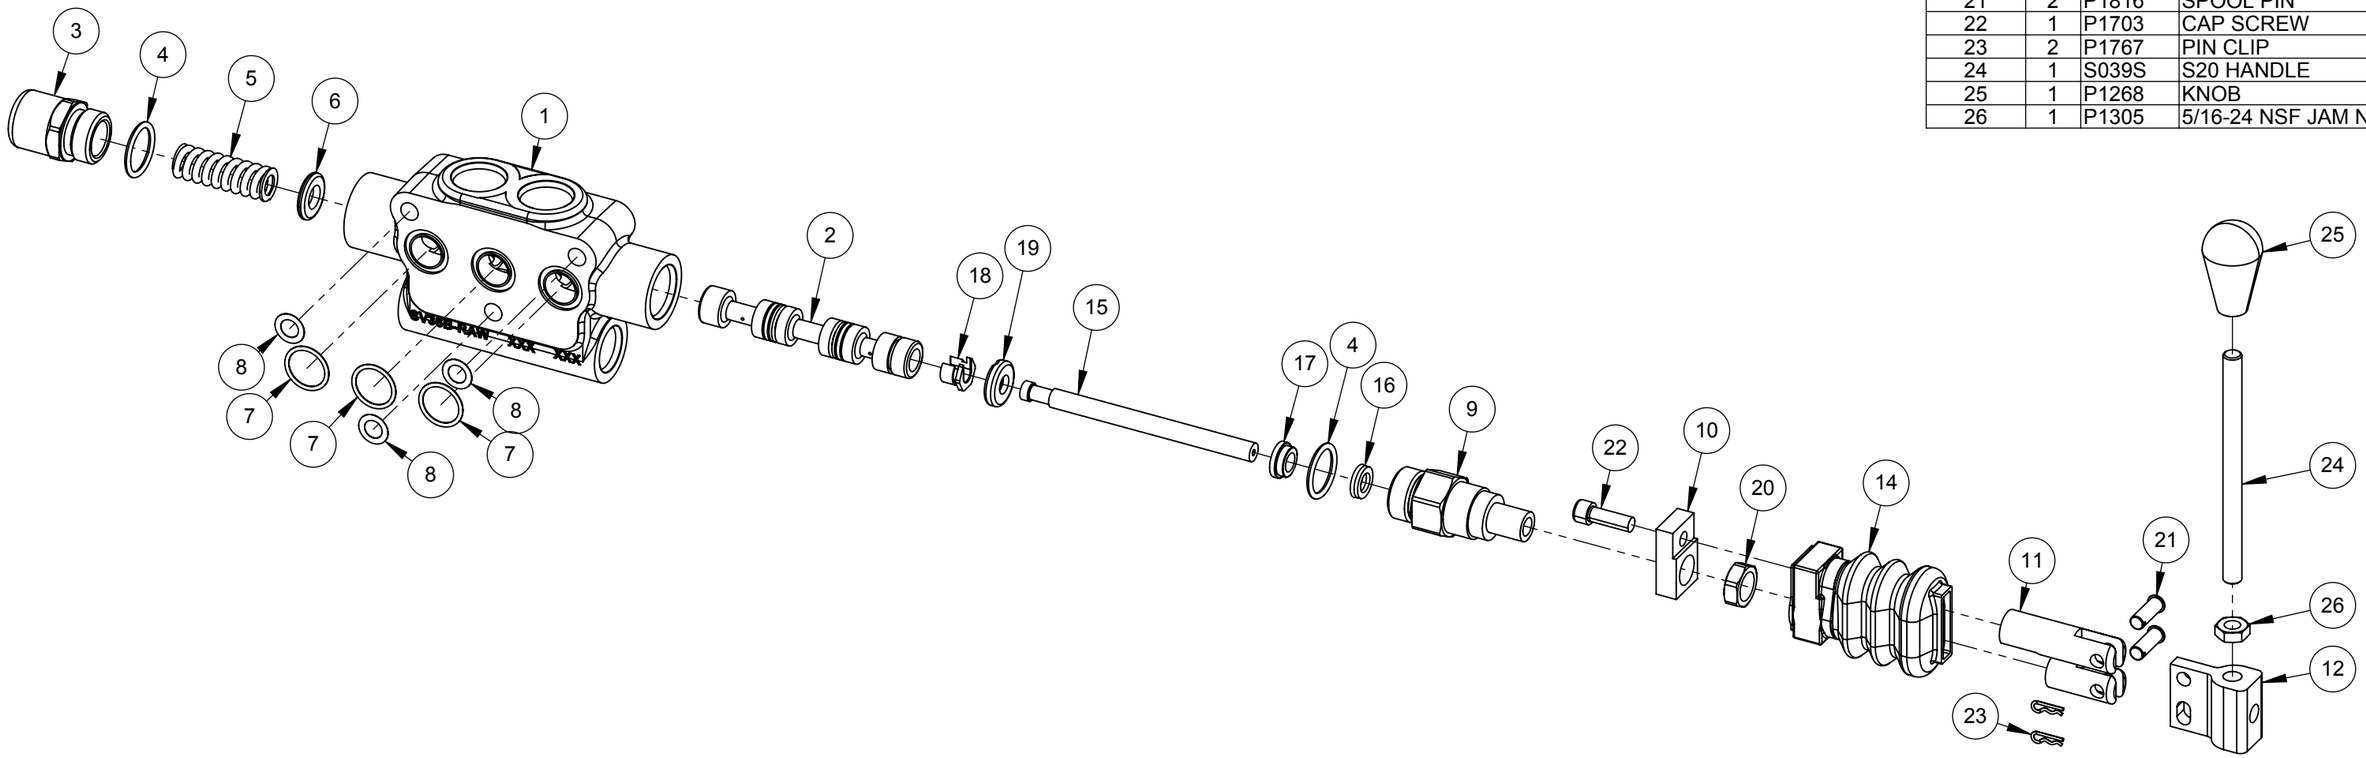

REV.	DATE	DESCRIPTION

NOTE:

1. (SEAL KIT) 36BK (SEE DRAWING 36BK FOR PARTS BREAKDOWN)

BRAND HYDRAULICS CO., INC
2332 SOUTH 25TH STREET, OMAHA NEBRASKA 68105

TITLE: S36, LOW WORK SECTION
BLOCKED, ELEC. & MAN.

MATERIAL: - -

STANDARD TOLERANCE UNLESS NOTED:
0.00 ± 0.010 (0.015 GCI)
0.000 ± 0.005 (0.010 GCI)
⌀ = .005 TIR
FRACTION ± 1/32
ANGLE ± 2°
DIMENSIONS ARE IN INCHES

P/N ENDING IN "UF" HAVE NOT RECEIVED FINISH OPERATIONS

FINISHING SPECIFICATIONS:
HEAT TREAT: -±2RC X - ⩛
GRIND: -
PLATE: -

DRAWN BY: R. BATT
DATE: 02/15/2013
APRV'D BY:
APRV'D DATE:
SCALE: 2:5
FORMAT - B

PART NO: 38BGXHA

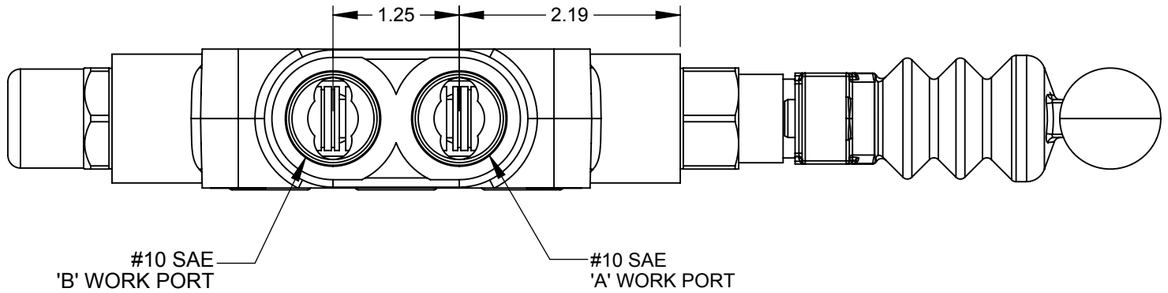

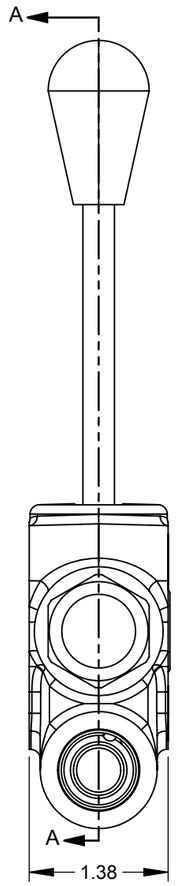

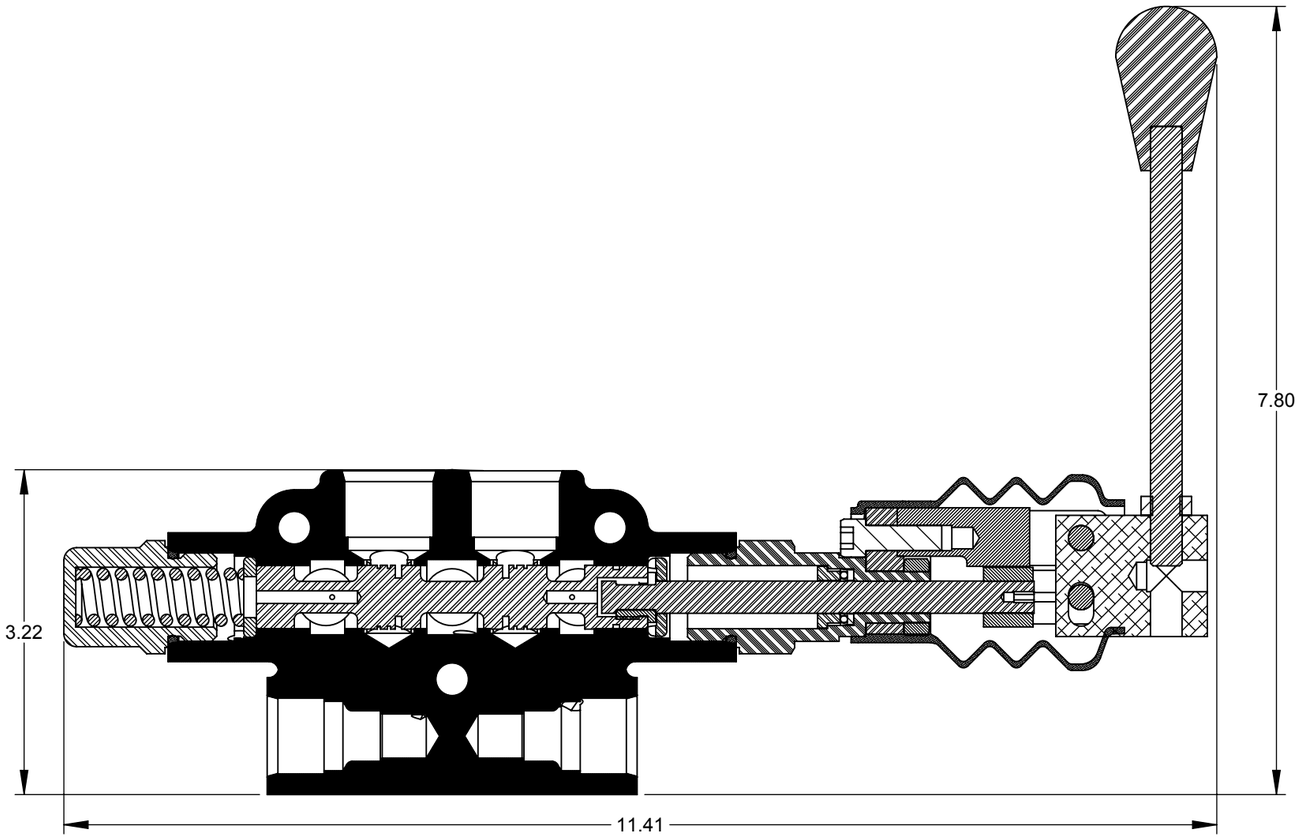

SECTION A-A

BRAND HYDRAULICS CO., INC 2332 SOUTH 25TH STREET, OMAHA NEBRASKA 68105			
TITLE: S36, LOW WORK SECTION BLOCKED, ELEC. & MAN.			MATERIAL: - -
STANDARD TOLERANCE UNLESS NOTED: 0.00 ± 0.010 (0.015 GCI) 0.000 ± 0.005 (0.010 GCI) ⌾ = .005 TIR FRACTION ± 1/32 ANGLE ± 2° DIMENSIONS ARE IN INCHES	P/N ENDING IN "UF" HAVE NOT RECEIVED FINISH OPERATIONS FINISHING SPECIFICATIONS: HEAT TREAT: -±2RC X - ⩛ GRIND: - PLATE: -	DRAWN BY: R. BATT DATE: 02/15/2013 APRV'D BY: APRV'D DATE: SCALE: 2:3 FORMAT - B	PART NO: 38BGXHA